


# Navilock GNS401 MT3329 TTL+USB GPS Engine Module

## Opis

This engine module concerns a complete GNSS receiver and including a patch.....

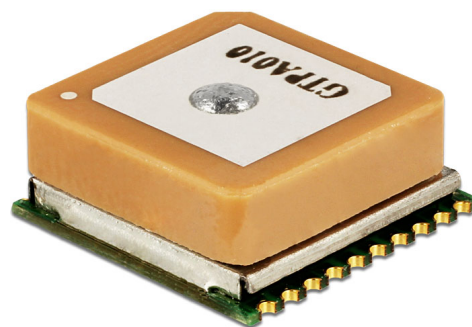

**Numer artykułu 60547**

EAN: 4037735104655

Kraj pochodzenia:  
GERMANY

Opakowanie: Retail Box

## Cechy szczególne

- USB 2.0 + LVTTTL
- Vcc 3,2 V bis 5 V
- Up to 5 Hz

## Specyfikacja

- Chipset: MT3329
- N<sub>avg</sub> -165 dB
- LVTTTL und USB 2.0
- Concurrent receipt 22/Tracking, 66/Acquisition Satelliten
- NMEA: GPRMC, GPGSA, GPGSV, GPGGL, GPVTG (default)
- DGPS/RTCM or SBAS (RTCM 104, 106, 108, 110, 114, 118, 119, 120, 122, 123, 124, 125, 126, 127, 128, 129, 130, 131, 132, 133, 134, 135, 136, 137, 138, 139, 140, 141, 142, 143, 144, 145, 146, 147, 148, 149, 150, 151, 152, 153, 154, 155, 156, 157, 158, 159, 160, 161, 162, 163, 164, 165, 166, 167, 168, 169, 170, 171, 172, 173, 174, 175, 176, 177, 178, 179, 180, 181, 182, 183, 184, 185, 186, 187, 188, 189, 190, 191, 192, 193, 194, 195, 196, 197, 198, 199, 200, 201, 202, 203, 204, 205, 206, 207, 208, 209, 210, 211, 212, 213, 214, 215, 216, 217, 218, 219, 220, 221, 222, 223, 224, 225, 226, 227, 228, 229, 230, 231, 232, 233, 234, 235, 236, 237, 238, 239, 240, 241, 242, 243, 244, 245, 246, 247, 248, 249, 250, 251, 252, 253, 254, 255)
- Position accuracy 2,50 m
- Update Rate 1/s, 9600 bps (default)
- Real time clock intern (RTC)
- A-GPS (Internet required)
- TTFF (Time to first FIX)
  - Cold 35s
  - Warm 34s
  - Hot 1s

- Stromaufnahme tracking: 37 mA @ 3,30 V
  - Abmessungen: 16,00 x 16,00 x 6,00 mm
  - Patchantenne 15,00 x 15,00 x 4,00 mm
  - Betriebstemperatur: -40 °C ~ 85 °C
- 

## Zawartość opakowania

- GNSS Module
  - CD
- 

## Zdjęcia

