


Navilock NL-621ETTL u-blox 6 GPS Engine Module

Description

The GPS Engine Board Module is due to its compact design and low power consumption ideal for any application in small systems. The module is based on the u-blox 6 high performance chipset which features high sensitivity and a very fast Time To First Fix, also with a low signal.

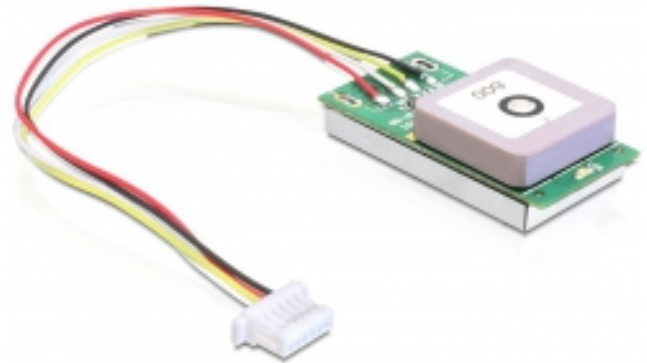

Specification

- Chipset: u-blox 6
- GPS Frequency: L1, 1575.42 MHz
- Average power consumption: 50 mA
- Voltage: 3.5 V ~ 5.5 V
- Update rate: 1-5 Hz
- Accepts the signals of up to 50 satellites at the same time
- Operating temperature: - 40 °C to 85 °C (with Battery: - 10 °C ~ 60 °C)
- Baudrate: 38400 bps
- Sensitivity: - 160 dBm (tracking)
- Hot start: • Warm start: • Cold start: • 1 x LED for Satfix
- Connector: 4 pin connector with cable
- Dimension (LxWxH): 30.0 mm x 15.2 mm x 8.0 mm

System requirements

- For Windows 2000/XP/Vista/7/8, Windows Mobile 2003/5/6, Linux ex Kernel 2.6, Mac 10.x
- MD6 connection cable

Package content

- GPS module
- CD-ROM

Item no. 60422

EAN: 4043619604227

Country of origin: Taiwan, Republic Of China

Package: Poly bag

Images

