


Navilock NL-630EUSB u-blox6 GPS Engine Module

Description

This is an extremely small powerful GPS module with u-blox 6 chipset. It is characterized by fast response, high sensitivity and low power consumption.

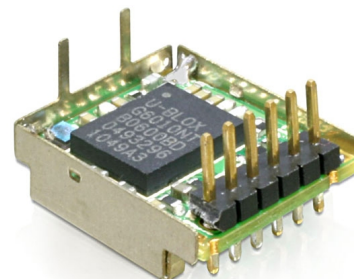

N° produit 60427

EAN: 4043619604272

Pays d'origine:

Emballage:

Spécifications techniques

- u-blox 6 chipset UBX-G6010-NT 50 channel
- GPS frequency: L1, 1575.42 MHz
- A-GPS support
- Schnittstelle: USB 2.0
- Current: 50 mA
- Operating Temperature: -40°C - 85°C
- Sensitivity: -160 dBm
- Update rate 1 Hz - 5 Hz
- Interface velocity: 9600 bps N-8-1
- Backup battery optional
- 10 x 12 x 3.5 mm
- Antenna: without
- Antenna interface: 1x I-PEX Inc., MHF/U.FL compatible connector
- Current for external antenna: 30 mA

Configuration système requise

- For MS Windows 2000/XP/Vista/7/8, Windows Mobile 2003/5/6, Linux Kernel 2.6, Mac 10.x

Contenu de l'emballage

- GPS module

Image

