


Navilock MT5631B GNSS BEIDOU GPS TTL PPS Engine Board

Description

At this GNSS engine module they need to connect only a GNSS antenna and the supply voltage thus obtain a complete GNSS receiver.

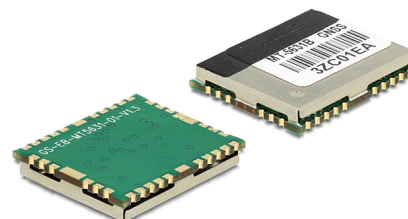

N° produit 60434

EAN: 4043619604340

Pays d'origine: Taiwan

Emballage: Poly bag

Spécifications techniques

- TK MT3333 high sensitivity chipset
- Support 99 search channels and 33 simultaneous tracking channels.
- Frequency: L1, 1575.420 MHz
- Frequency: B1, 1561.098 MHz
- Very high sensitivity (Tracking Sensitivity: chipset -165dBm)
- Extremely fast TTFF (Time To First Fix) at low signal level
- Built-in LNA
- Compact size (15.90 x 13.10 x 2.4 mm) suitable for space-sensitive application
- Operation temperature: -40°C ~ 85°C
- Voltage: 3.3 ~ 6.0 V DC
- Current: typ. 25 mA
- One size component, easy to mount on another PCB board
- Supports NMEA 0183 V4.0 (GGA, GSA, GSV, RMC, VTG, GLL, ZDA)
- Supports WASS/EGNOS/MSAS/GAGAN (depends on firmware setting)
- Supports PPS (puls per second)
- 36 pin stamp holes

Contenu de l'emballage

- GNSS module

Image

