


Navilock GNS401 MT3329 TTL+USB GPS Engine Module

Descripción

This engine module concerns a complete GNSS receiver and including a patch.....

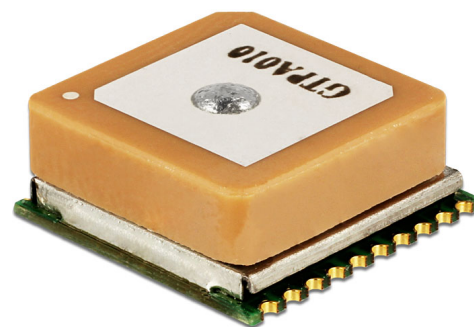

Número de elemento 60547

EAN: 4037735104655

Pais de origen:
GERMANY

Paquete: Retail Box

Características especiales

- USB 2.0 + LVTTL
- Vcc 3,2 V bis 5 V
- Up to 5 Hz

Especificación técnica

- Chipset: MT3329
- N_{avg} -165 dB
- LVTTL und USB 2.0
- Concurrent receipt 22/Tracking, 66/Acquisition Satelliten
- NMEA: GPRMC, GPGSA, GPGSV, GPGGL, GPVTG (default)
- DGPS/RTCM or SBAS (RTCM 104, 106, 108, 110, 114, 118, 119, 120, 122, 123, 124, 125, 126, 127, 128, 129, 130, 131, 132, 133, 134, 135, 136, 137, 138, 139, 140, 141, 142, 143, 144, 145, 146, 147, 148, 149, 150, 151, 152, 153, 154, 155, 156, 157, 158, 159, 160, 161, 162, 163, 164, 165, 166, 167, 168, 169, 170, 171, 172, 173, 174, 175, 176, 177, 178, 179, 180, 181, 182, 183, 184, 185, 186, 187, 188, 189, 190, 191, 192, 193, 194, 195, 196, 197, 198, 199, 200, 201, 202, 203, 204, 205, 206, 207, 208, 209, 210, 211, 212, 213, 214, 215, 216, 217, 218, 219, 220, 221, 222, 223, 224, 225, 226, 227, 228, 229, 230, 231, 232, 233, 234, 235, 236, 237, 238, 239, 240, 241, 242, 243, 244, 245, 246, 247, 248, 249, 250, 251, 252, 253, 254, 255)
- Position accuracy 2,50 m
- Update Rate 1/s, 9600 bps (default)
- Real time clock intern (RTC)
- A-GPS (Internet required)
- TTFF (Time to first FIX)
 - Cold 35s
 - Warm 34s
 - Hot 1s

- Stromaufnahme tracking: 37 mA @ 3,30 V
 - Abmessungen: 16,00 x 16,00 x 6,00 mm
 - Patchantenne 15,00 x 15,00 x 4,00 mm
 - Betriebstemperatur: -40 °C ~ 85 °C
-

Contenido del paquete

- GNSS Module
 - CD
-

Image

