


# Navilock NL-290BG SMA BeiDou + GPS Multi GNSS Antenna 3 m

## Description

You can use this active antenna for your GNSS equipment to receive GPS and BeiDou (COMPASS) signals simultaneously.

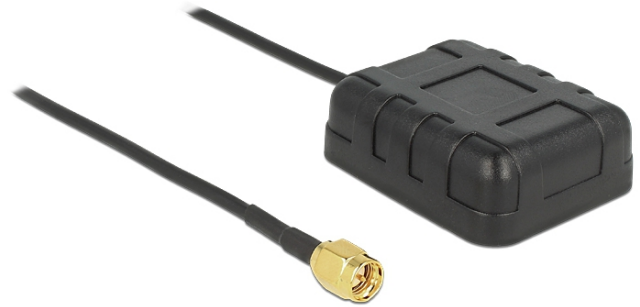

ca. 3 m

## Specification

- External active additional antenna for GNSS receivers
- Connector: SMA plug
- Polarisation: RHCP
- Frequency range:
  - GPS: 1575.42 MHz +/- 3 MHz
  - BeiDou: 1561.098 MHz +/- 5 MHz
- Patch antenna: 3 dBic
- Patchantenne: 25 x 25 x 6 mm
- VSWR: • Axial Ratio: 3 dB
- LNA
  - Gain: 28 dB
  - VSWR: • Impedance: 50 Ohm
  - Operating voltage: 3.0 ~ 5.0 V
  - Current consumption: 10 ~ 20 mA
  - Operating temperature: -40 °C ~ 85 °C
  - Protection class: IP65
  - Weight: 0.150 kg
  - Cable type: RG174
  - Cable diameter: ca. 2.5 mm
  - Cable colour: black
  - Cable length incl. connector: 3 m
  - Dimensions (LxWxH): ca. 5.00 x 4.25 x 1.65 cm
  - Magnetic housing bottom
  - Material: ABS

## System requirements

- GNSS device with SMA jack

## Package content

- GNSS antenna

## Item no. 60554

EAN: 4043619605545

Country of origin: China

Package: Poly bag



Images



ca. 3 m