


# Navilock NL-281GG SMA Plug GLONASS+GPS Multi GNSS antenna 3 m

## Description

This external Navilock GNSS antenna is equipped for the simultaneous reception of GPS and GLONASS signals.

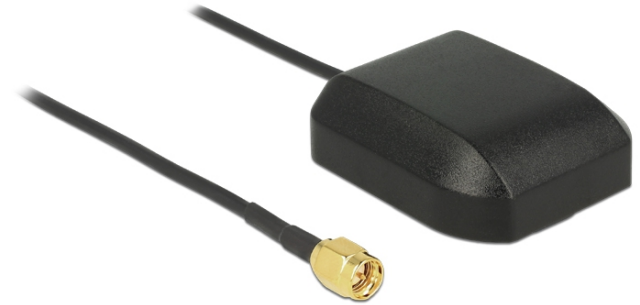

ca. 3 m

## Specification

- External active additional antenna for GNSS receivers
  - Connector: SMA plug
  - Polarisation: RHCP
  - Frequency range:
    - GPS: 1575,42 MHz +/- 1.023 MHz
    - GLONASS: 1598,0625 MHz ~ 1605,375 MHz
  - Bandwidth (C/A):
    - GPS: > 2 MHz
    - GLONASS: > 8 MHz
  - Gain: 5 dBic (7cm x 7cm ground plane)
  - Internal patchantenna: 25 x 25 x 4 mm
  - VSWR: 1.5
- LAN
- Gain: 30 dBi
  - Cable category: coaxial
  - Cable typ: RG-174
  - Cable length: 3 m
  - Cable colour: black
  - Impedance: 50 Ohm
  - Voltage: 2.80 ~ 5.00 V
  - Current: typ. 13.50 mA @ 3.0 V
  - VSWR: 2.0
  - Impedanz: 50 Ohm
  - Protection class: IP66
  - Weight: 0.150 kg
- Dimension (LxWxH): ca. 44.00 x 37.00 x 14.50 mm
  - Magnetical bottom

## System requirements

- Device with free SMA connector

## Package content

- GNSS antenna

## Item no. 60555



EAN: 4043619605552

Country of origin: China

Package: Poly bag



Images



Test condition: 27x27mm ground

