


Navilock NL-281GG SMA Plug GLONASS+GPS Multi GNSS antenna 3 m

Description

This external Navilock GNSS antenna is equipped for the simultaneous reception of GPS and GLONASS signals.

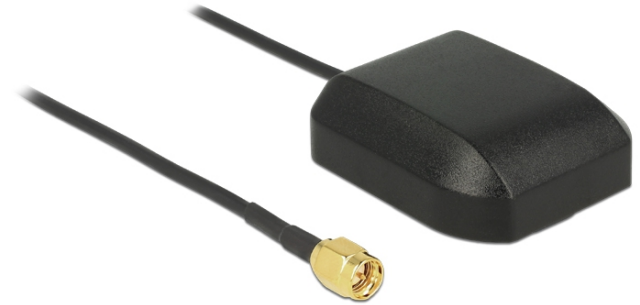

ca. 3 m

Specification

- External active additional antenna for GNSS receivers
 - Connector: SMA plug
 - Polarisation: RHCP
 - Frequency range:
 - GPS: 1575,42 MHz +/- 1.023 MHz
 - GLONASS: 1598,0625 MHz ~ 1605,375 MHz
 - Bandwidth (C/A):
 - GPS: > 2 MHz
 - GLONASS: > 8 MHz
 - Gain: 5 dBic (7cm x 7cm ground plane)
 - Internal patchantenna: 25 x 25 x 4 mm
 - VSWR: 1.5
- LAN
- Gain: 30 dBi
 - Cable category: coaxial
 - Cable typ: RG-174
 - Cable length: 3 m
 - Cable colour: black
 - Impedance: 50 Ohm
 - Voltage: 2.80 ~ 5.00 V
 - Current: typ. 13.50 mA @ 3.0 V
 - VSWR: 2.0
 - Imedanz: 50 Ohm
 - Protection class: IP66
 - Weight: 0.150 kg
- Dimension (LxWxH): ca. 44.00 x 37.00 x 14.50 mm
 - Magnetical bottom

System requirements

- Device with free SMA connector

Package content

- GNSS antenna

Item no. 60555



EAN: 4043619605552

Country of origin: China

Package: Poly bag



Images

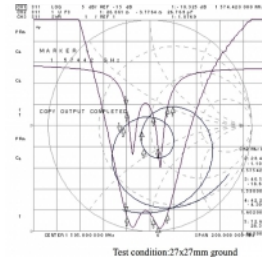

Test condition: 27x27mm ground

