
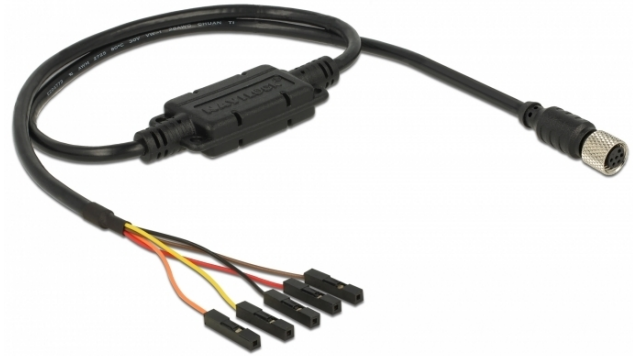


Navilock Connection Cable M8 female serial waterproof > 5 pin pin header, pitch 2.54 mm TTL (5 V) 1.2 m

Description

The waterproof connection cable by Navilock converts the serial signals for all M8 receivers to TTL 5 V signals. Compatible with TTL/CMOS this I/O interface is suitable for GPIO, UART, controller and CPU.

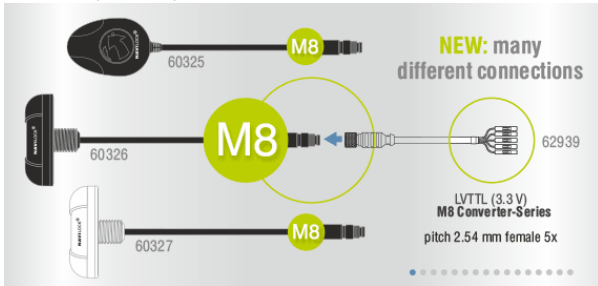

ca. 1,2 m

Specification

- Connectors:
 - 1 x M8 female >
 - 1 x 5 pin female pin header
- Pitch: 2.54 mm
- Chipset: ASIX ZT3221LEEY
- Data transfer: bidirectional
- Cable gauge: 28 AWG
- Voltage: 5 V
- Waterproof
- Cable colour: black
- Length incl. connectors (L): ca. 1.2 m

System requirements

- A Navilock serial M8 GNSS receiver

Package content


- Connection cable for M8 GNSS receiver
- Navilock support CD

Item no. 62891

EAN: 4043619628919

Country of origin: Taiwan, Republic of China

Package: Poly bag



Images



General	
Protection category:	standard water proof
Interface	
connector:	standard 1 x M8 jack
Connector 1:	standard 1 x 2,54 mm pin header 5 pin female
Technical characteristics	
Chipset:	standard ASIX ZT3221LEEY
Voltage:	standard 5 V
Physical characteristics	
Cable colour:	standard black
Cable length incl. connector:	standard 1.20 m