


# Navilock Connection Cable M8 female serial waterproof > 3.5 mm 3 pin stereo jack male 90° TTL (5 V) 1.2 m

## Description

The waterproof connection cable by Navilock converts the serial signals universally for all M8 receivers to TTL 5 V signals. Compatible with TTL/CMOS 5.0 V this I/O interface is suitable for GPIO, UART, controller and CPU.

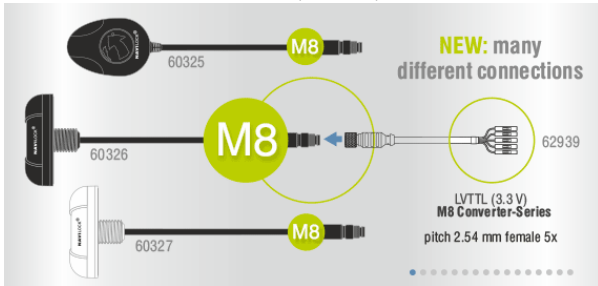

ca. 1,2 m

## Specification

- Connectors:  
1 x M8 female >  
1 x 3.5 mm 3 pin stereo jack male 90°
- Chipset: ASIX ZT3221LEEY
- Data transfer: unidirectional
- Cable gauge: 28 AWG
- Voltage: 5 V
- Waterproof
- Cable colour: black
- Length incl. connectors (L): ca. 1.2 m

## System requirements

- A Navilock serial M8 GNSS receiver

## Package content

- Connection cable for GNSS receiver
- Navilock support CD

## Item no. 62894

EAN: 4043619628940

Country of origin: Taiwan, Republic of China

Package: Zip poly bag

## Images



<b>General</b>	
Protection category:	waterproof
Style:	angled 90°
<b>Interface</b>	
connector:	1 x M8 jack
Connector 1:	1 x 3.5 mm 3 pin stereo jack male
<b>Technical characteristics</b>	
Chipset:	ASIX ZT3221LEEY
Voltage:	5 V
<b>Physical characteristics</b>	
Cable colour:	black
Cable length incl. connector:	120 cm