


# Navilock Connection Cable MD6 female serial > 5 x 1 pin pin header, pitch 2.54 mm LVTTTL (3.3 V) 52 cm

## Description

The connection cable by Navilock converts the serial signals for all MD6 receivers to LVTTTL 3.3 V signals. Compatible with TTL/CMOS 3.3 V this I/O interface is suitable for GPIO, UART, controller and CPU.

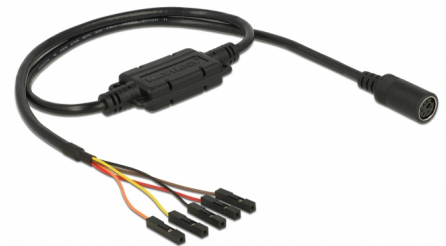

52 cm

**Item no. 62929**

EAN: 4043619629299

Country of origin: Taiwan,  
Republic of China

Package: Zip poly bag

## Specification

- Connectors:
  - 1 x MD6 female >
  - 5 x 1 pin female pin header
- Pitch: 2.54 mm
- Chipset: ASIX ZT3221LEEY
- Data transfer: bidirectional
- Cable gauge: 28 AWG
- Voltage: 3.3 V
- Cable colour: black
- Length incl. connectors (L): ca. 52 cm


## System requirements

- A Navilock serial MD6 GNSS receiver

## Package content

- Connection cable for GNSS receiver
- Navilock support CD

## Images

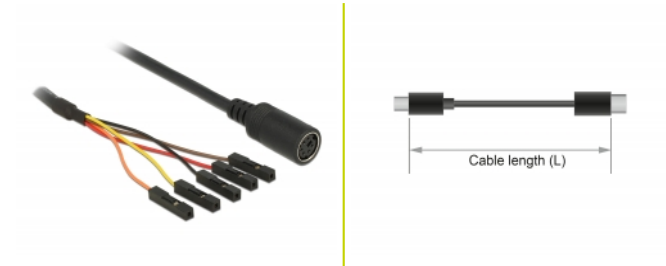

## Interface

connector:	1 x MD6 jack
Connector 1:	1 x 2,54 mm pin header 5 pin female

## Technical characteristics

Chipset:	ASIX ZT3221LEED
Voltage:	5 V

## Physical characteristics

Cable colour:	black
Cable length incl. connector:	52 cm