


Navilock Connection Cable M8 female serial waterproof > 2.5 mm 4 pin stereo jack male 90° LVTTL (3.3 V) 1.2 m

Description

The waterproof connection cable by Navilock converts the serial signals for all M8 receivers to LVTTL 3.3 V signals. Compatible with LVTTL/CMOS 3.3 V is this interface suitable for GPIO, UART, controller and CPU.

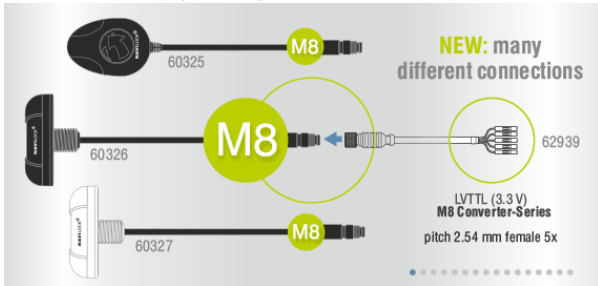

ca. 1,2 m

Specification

- Connectors:
1 x M8 female >
1 x 2.5 mm 4 pin stereo jack male 90°
- Chipset: ASIX ZT3221LEEY
- Data transfer: bidirectional
- Cable gauge: 28 AWG
- Voltage: 3.3 V
- Waterproof
- Cable colour: black
- Length incl. connectors (L): ca. 1.2 m

System requirements

- A Navilock serial M8 GNSS receiver

Package content


- Connection cable for M8 GNSS receiver
- Navilock support CD

Item no. 62935

EAN: 4043619629350

Country of origin: Taiwan, Republic of China

Package: Poly bag



Images



General	
Protection category:	standard water proof
Interface	
connector:	standard 1 x M8 jack
Connector 1:	standard 1 x 2.5 mm 4 pin stereo jack male
Technical characteristics	
Chipset:	standard ASIX ZT3221LEEY
Voltage:	standard 3.3 V
Physical characteristics	
Cable colour:	standard black
Cable length incl. connector:	standard 1.20 m