


# Delock Active USB 3.2 Gen 1 Cable USB Type-A to USB Type-B 10 m

## Description

This active USB cable by Delock with integrated signal amplifiers is used to connect devices with USB Type-B female port to a PC or laptop with USB Type-A port. To ensure reliable data and power transmission, the included power supply unit must be connected to the cable via the DC socket on one of the signal amplifiers.

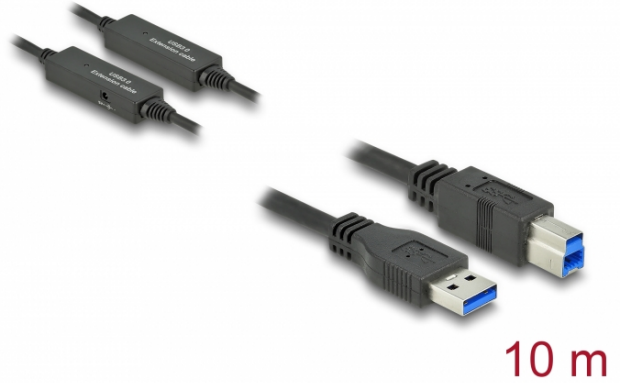

## Specification

- Connectors:
  - 1 x SuperSpeed USB (USB 3.2 Gen 1) Type-A male >
  - 1 x SuperSpeed USB (USB 3.2 Gen 1) Type-B male
  - 1 x DC jack
- Chipset: Genesys Logic GL3523
- Status LED
- Cable gauge:
  - 28 AWG data line
  - 24 AWG power line
- Cable diameter: ca. 5.5 mm
- Data transfer rate up to SuperSpeed USB 5 Gbps
- Colour: black
- With 2 signal amplifiers (at intervals of 5 m)
- Dimensions of signal amplifier (LxWxH): ca. 6.7 x 2.2 x 1.2 cm
- Length incl. connectors: ca. 10 m

## Power supply specification

- Wall power supply
- Input: AC 100 ~ 240 V / 50 ~ 60 Hz / 0.25 A
- Output: 5 V / 1 A
- Ground outside, plus inside
- Dimensions:
  - inside:  $\varnothing$  ca. 1.1 mm
  - outside:  $\varnothing$  ca. 3.5 mm
  - length: ca. 7.0 mm

## System requirements

- PC or laptop with a free USB Type-A port

## Package content

- USB 3.2 Gen 1 cable
- External power supply

## Item no. 85380

EAN: 4043619853809

Country of origin: China

Package: White Box

Images



General	
Specification:	SuperSpeed USB (USB 3.2 Gen 1)
Interface	
Connector 1:	1 x SuperSpeed USB (USB 3.2 Gen 1) Type-A male
Connector 2:	1 x SuperSpeed USB (USB 3.2 Gen 1) Type-B male
Technical characteristics	
Chipset:	Genesys Logic GL3523
Data transfer rate:	5 Gbps
Physical characteristics	
Cable diameter:	5.5 mm
Conductor gauge:	28 AWG data line 24 AWG power line
Length:	10 m
Colour:	black
Power supply	
Type:	Euro wall power supply
Input:	AC 100 - 240 V / 50 - 60 Hz / 0.25 A
Output:	5 V / 1 A
Connector:	DC male 3,5 mm x 1,1 mm