Delock LTE MIMO GNSS Antenna 3 x SMA plug

RG-174 3 m screw mounting outdoor black

Description

This antenna by Delock allows the usage of different **LTE** and **GNSS** bands **indoors and outdoors**. It is completely compatible to GSM, UMTS, LTE, ZigBee, DECT, Z-Wave, NB-IoT, GNSS, Bluetooth, ISM, MIMO and LoRa 868 MHz / 915 MHz.



Item no. 12700

EAN: 4043619127009 Country of origin: China

Package: Box

Technical details

Connectors: 3 x SMA plug

• 2 x LTE:

Frequency range: 698 MHz - 960 MHz 1710 MHz - 2690 MHz

Impedance: 50 Ohm

VSWR: 3.0

Antenna gain: 2.0 - 2.5 dBi

Polarisation: linear

• GNSS:

Frequency range:

GALILEO: E1, 1575.4200 MHz GPS: L1, 1575.4200 MHz

Antenna gain: 2 dBi

VSWR: 1.5

Impedance: 50 Ohm Polarisation: RHCP

• LNA GNSS:

Frequency range:

GALILEO: E1, 1575.4200 MHz GPS: L1, 1575.4200 MHz

DATASHEET



Antenna gain: 28 dBi

Operating voltage: 2.2 - 5.0 V Current consumption: 5 - 15 mA

VSWR: 2.0

Impedance: 50 Ohm

• Mounting type: screw mounting

• Operating temperature: -40 °C ~ 85 °C

Housing material: ABSProtection class: IP67

• Colour: black

Cable type: coaxialCable type: RG-174Cable colour: black

• Cable diameter: ca. 2.7 mm

• Cable attenuation: 1.5 dB @ 1.5 GHz per meter

Smallest bending radius: 10.5 mm
Cable length incl. connector: ca. 3 m
Dimensions (Ø x H): ca. 81.3 x 16.3 mm

System requirements


• Device with multiple free SMA ports

Package content

• Antenna



Images

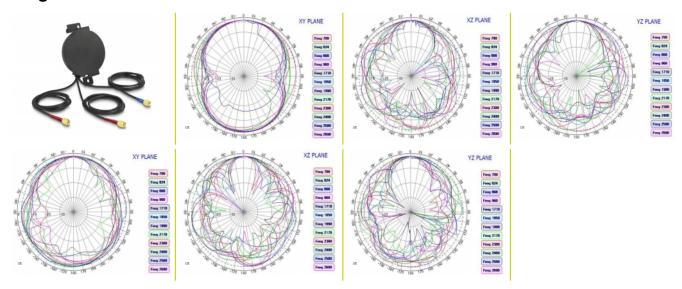





General

Mounting type:	Screw mounting
Protection category:	IP67
Suitable for outdoor:	yes

Interface

Connector 1:	2 x SMA male for LTE
Connector 2:	1 x SMA plug GNSS

Technical characteristics

Frequency range:	698 MHz - 960 MHz GPS: L1, 1,5754200 GHz 1710 MHz - 2690 MHz GALILEO: E1. 1.5754200 GHz
Antenna gain:	LTE MIMO: 2.5 dBi GNSS: 28 dB
Impedance:	50 Ω
Operating temperature:	-40 °C ~ 85 °C
Polarisation:	linear
VSWR:	2.0

Physical characteristics

Housing material:	ABS
Cable category:	coaxial
Cable type:	RG-174
Cable attenuation:	1.5 dB @ 1.5 GHz per meter
Cable colour:	black
Cable length incl. connector:	3 m
Diameter:	83.3 mm



DATASHEET

Height:	16.3 mm
Smallest bending radius:	10.5 mm
Colour:	black
Thread type:	M12