


Navilock Connection Cable M8 female serial waterproof > 3.5 mm 3 pin stereo jack male 90° TTL (5 V) 1.2 m

Description

The waterproof connection cable by Navilock converts the serial signals universally for all M8 receivers to TTL 5 V signals. Compatible with TTL/CMOS 5.0 V this I/O interface is suitable for GPIO, UART, controller and CPU.

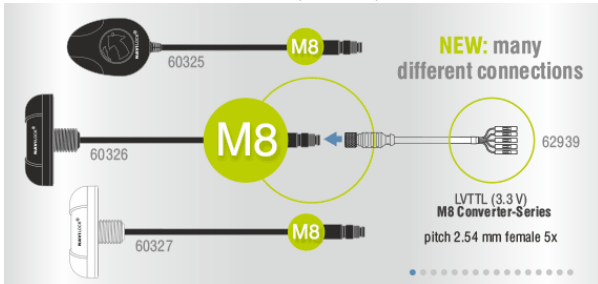

ca. 1,2 m

Specification

- Connectors:
 - 1 x M8 female >
 - 1 x 3.5 mm 3 pin stereo jack male 90°
- Chipset: ASIX ZT3221LEEY
- Data transfer: unidirectional
- Cable gauge: 28 AWG
- Voltage: 5 V
- Waterproof
- Cable colour: black
- Length incl. connectors (L): ca. 1.2 m

System requirements

- A Navilock serial M8 GNSS receiver

Package content


- Connection cable for GNSS receiver
- Navilock support CD

Item no. 62894

EAN: 4043619628940

Country of origin: Taiwan, Republic of China

Package: Poly bag



Images



General

Protection category:	standard water proof
Style:	standard angled 90°

Interface

connector:	standard 1 x M8 jack
Connector 1:	standard 1 x 3.5 mm 3 pin stereo jack male

Technical characteristics

Chipset:	standard ASIX ZT3221LEEY
Voltage:	standard 5 V

Physical characteristics

Cable colour:	standard black
Cable length incl. connector:	standard 120 cm